

### Features

**Longer Cycle Life:** Offers up to 10 times longer cycle life and five times longer float/calendar life than lead acid battery, helping it minimize replacement cost and reduce total cost of ownership.

**Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A'drop in' replacement for lead acid batteries.

**Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.


**Wider Temperature Range:** -20 ~ 60°C

**Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

**Multi Protocol:** The battery work well with multiple brands of inverters.



### Dimension-mm

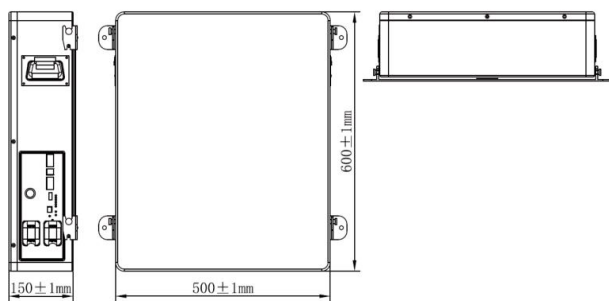

### Application

- Indoor/outdoor telecom base stations
- Household energy storage system
- Smart transportation backup power supply


### Specification

Basic Parameters	Rated Voltage	51.2V
	Rated Capacity	150Ah
	Rated Energy	7680wh
	Combination Method	16S1P
	Cycle Life	≥3500 cycles @80%DOD
	Self Discharge	1%/months
	Efficiency of Charge	≥97%
	Efficiency of Discharge	≥98%
Charge	Charge Voltage	57.6V
	Charge Current (Recomm.)	30A
	Charge Current (Max.)	100A
Discharge	Discharge Cut-off Voltage	43.2V
	Discharge Current(Recomm.)	50A
	Pulse Current	100A
Environment	Charge Temperature	0°C to 60°C
	Discharge Temperature	-20°C to 60°C
	Humidity	5% to 95%
Physical Characteristics	IP Class	IP30
	Case Materia	Metal
	Dimensions ( mm )	600*500*150mm
	Weight ( kg )	65kg
	Others( optional )	CAN communication , LCD display


# Lithium Iron (LiFePO<sub>4</sub>) Battery

ALFP-48150H(51.2V 150Ah)


**Different Rate Discharge Curve (25°C)**

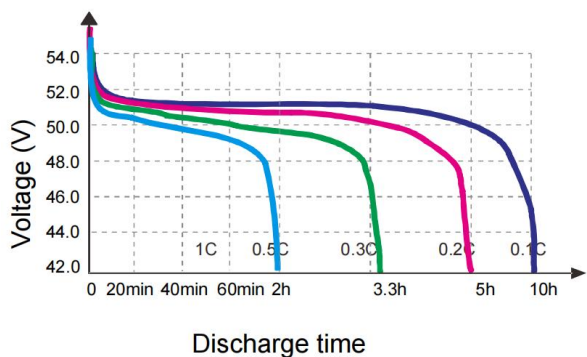


**Different Temperature Discharge Curve (0.5C)**

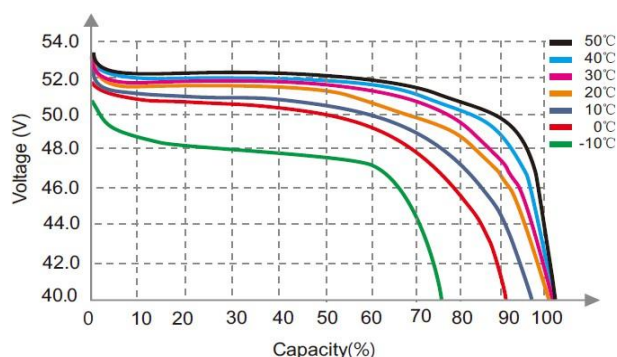


**State of Charge Curve (0.5C, 25°C)**

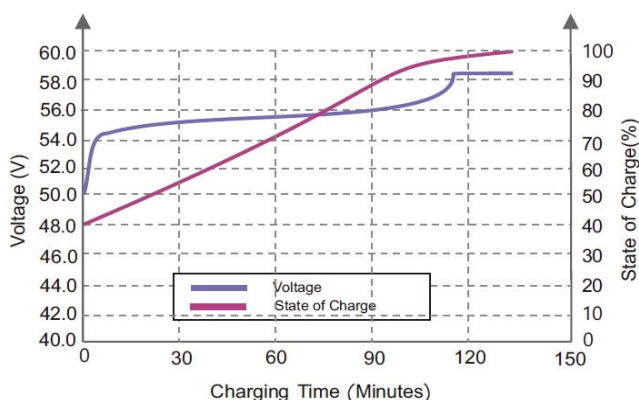


**Charging Characteristics (0.5C, 25°C)**

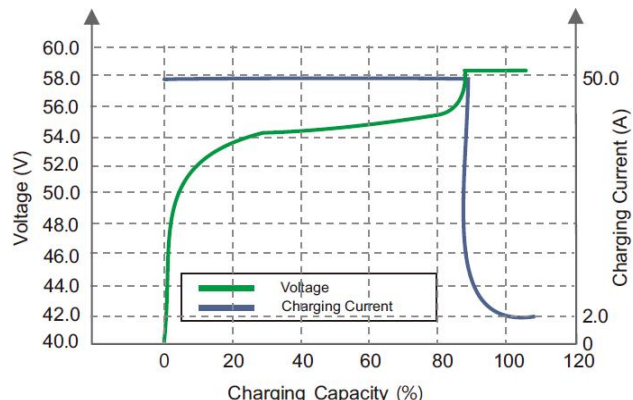

**Different DOD Discharge Cycle Life Curve (0.5C)**

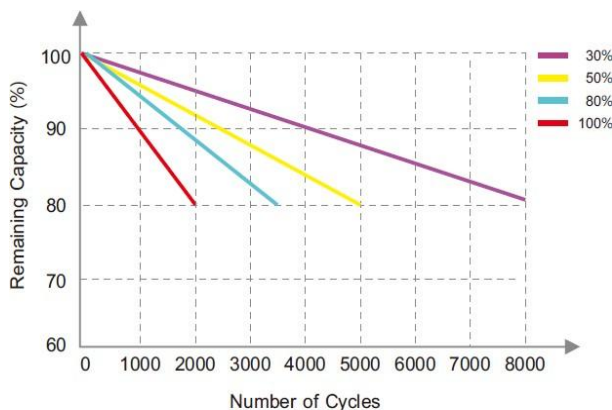

**Different Temperature Self Discharge Curve**

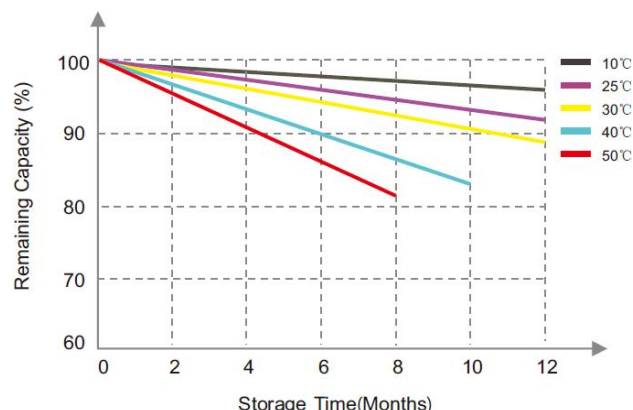

Add: High-tech Industrial Development Zone,  
Yingde City, Guangdong Province, China  
Web: [www.aokly-battery.com](http://www.aokly-battery.com)  
Email: [sales@aokly-battery.com](mailto:sales@aokly-battery.com)

© 2024 AOKLY GROUP. All rights reserved.

Trademarks and logos are the property of AOKLY GROUP and its affiliates unless otherwise noted. Subject to revisions without prior notice.